


DAMME

KUNSTSTOFFEN

Platin® flat rainwater tank

15
years
warranty

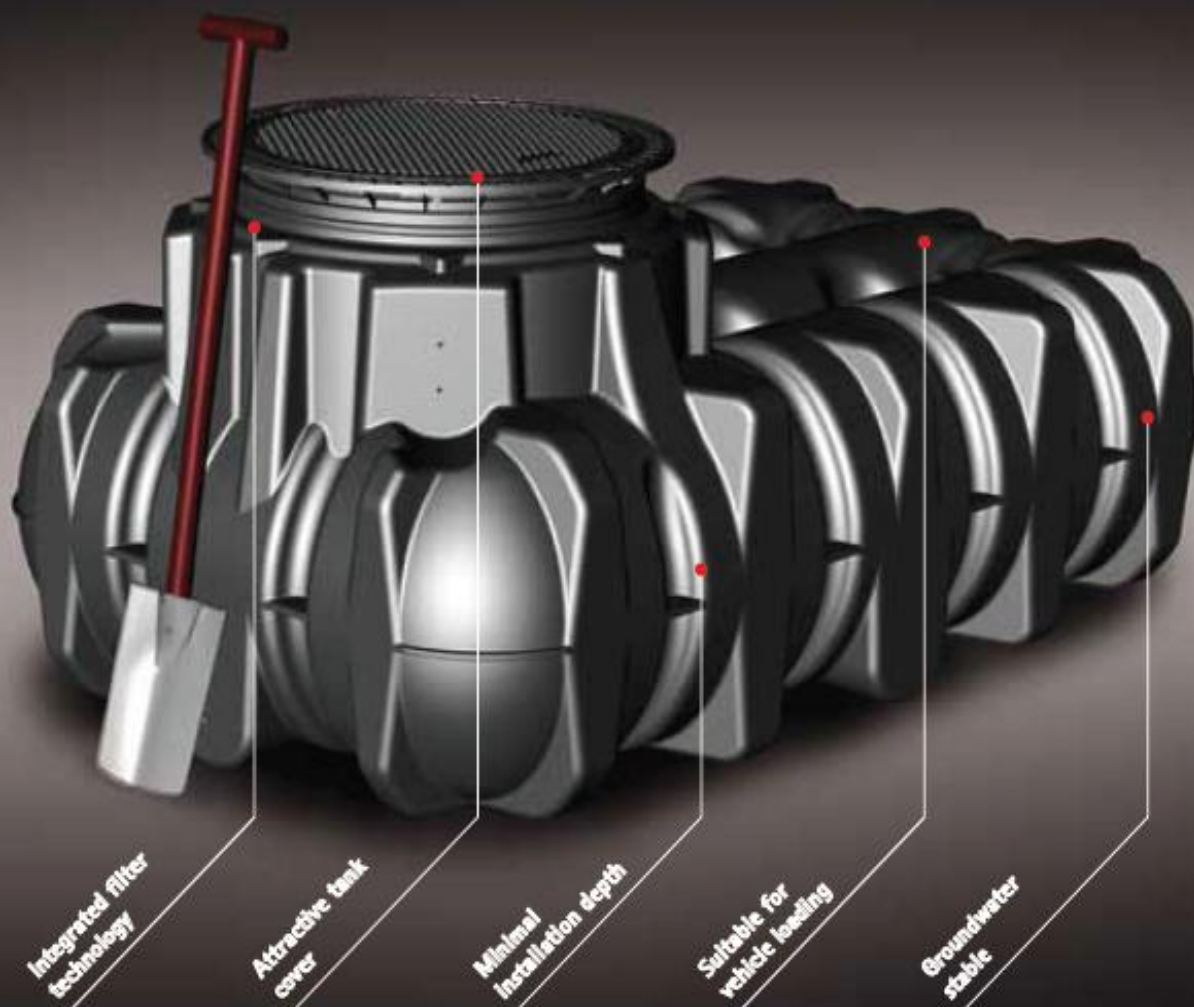

How do you install a tank? I know!

It's as easy as 1, 2, 3.



2 friends



2 spades



1 morning

DAMME

KUNSTSTOFFEN

Less digging. Less work. Fewer costs.




Photos of installing the Platin® 1500 flat tank are available from www.graf.info

80%* less digging compared with a cylindric cistern*.

Save more than 150* wheelbarrow loads of soil*!




Platin® 3000 L



Low installation depth – so no slope angle required

Excavation approx 7.6 m³ / 268 ft³

Cylindric cistern 3000 L

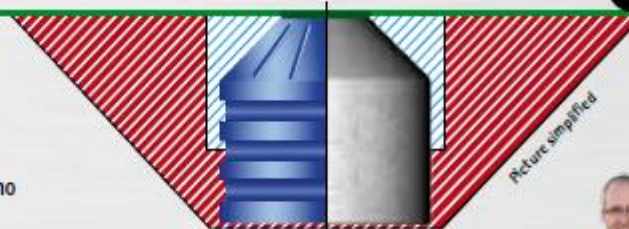

Excavation approx 49 m³ / 1730 ft³*




„The Platin® flat tank is easy to install. The completely flat pit and low tank weight make the work child's play. I was particularly impressed by the stability of the tank, the large tank dome and the professional, integrated filter technology. It's a solution which ticks all the boxes.“

Thomas Blum, landscape gardener



*Based on a vertical, cylindric cistern with a useable volume of 3000 ltr, a height of 1,90 mtr and a diameter of 2,20 mtr. Calculation of excavation is under consideration of a ditch bottom of 10 cm, a sidewise distance of 50 cm and a slope with 45° gradient according to DIN 4124.

Platin[®] flat tank

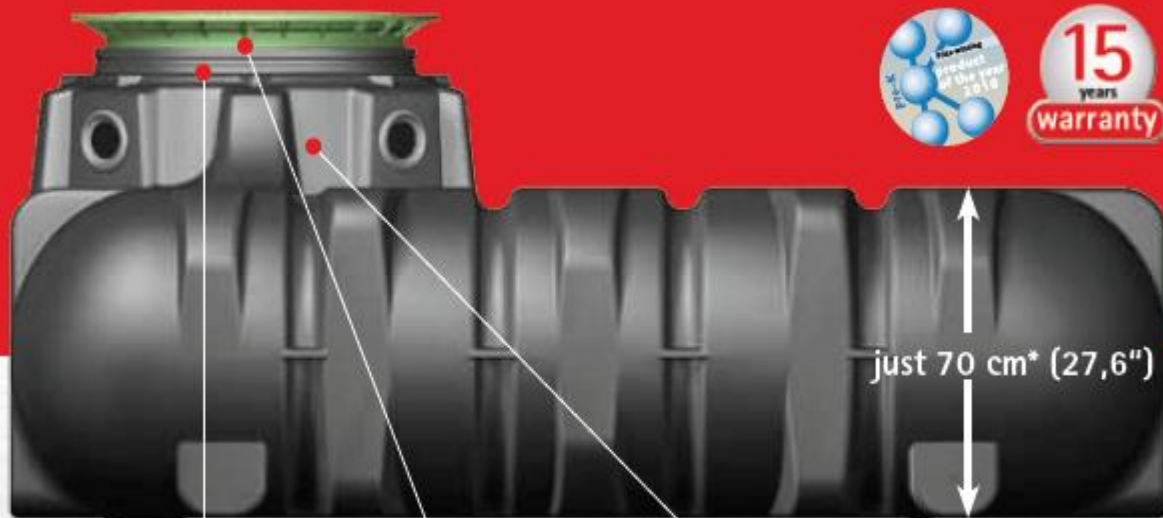

just 70 cm* (27,6")

GRAF brand quality –
try it for yourself!

- Minimum installation depth,
which translates into short
installation time and low costs
- Suitable for vehicle loading
- Groundwater stable



Integrated filter technology
Self-cleaning and low-maintenance



Large tank dome
for optimum filter assembly and maintenance



Attractive tank cover
Continuously variable telescoping and tilting, including child-proofing



The modular system Platin®

DAMME

KUNSTSTOFFEN



Choose your tank size

Flat tank Platin®

Suitable for vehicle loading in conjunction with the Telescopic dome shaft with cast-iron lid (accessory)



1500 Litres
400 US-Gal
Order no. 390000



3000 Litres
800 US-Gal
Order no. 390001



5000 Litres
1350 US-Gal
Order no. 390002



Select your desired tank cover



Telescopic dome shaft Mini,
suitable for pedestrian loading

Order no. 371010

Telescopic dome shaft Maxi,
suitable for pedestrian loading

Order no. 371011



Telescopic dome shaft cast-iron,
suitable for vehicle loading

Order no. 371020



Water connection box Internal
Draw water directly from the Platin flat tank.
Can be easily upgraded with the Mini telescopic dome shaft.

Order no. 375119



Select your desired tank filter package



Tank filter package
for the garden

- 100% water yield
- Filter can be removed without any tools
- Best suited for downstream infiltration

Order no. 342026



Tank filter package for the house

- Self-cleaning filter technology
- More than 95% water yield
- Minimum maintenance

Order no. 342025



Accessory
Minimax cleaning unit
without hose

Order no. 340044



Select your desired technical package



Technical package Garden Comfort

Order no. 342028




Technical package house Eco-Plus

Order no. 342029

Save up to 50% of your drinking water needs – with GRAF's complete packages!

Use in the garden

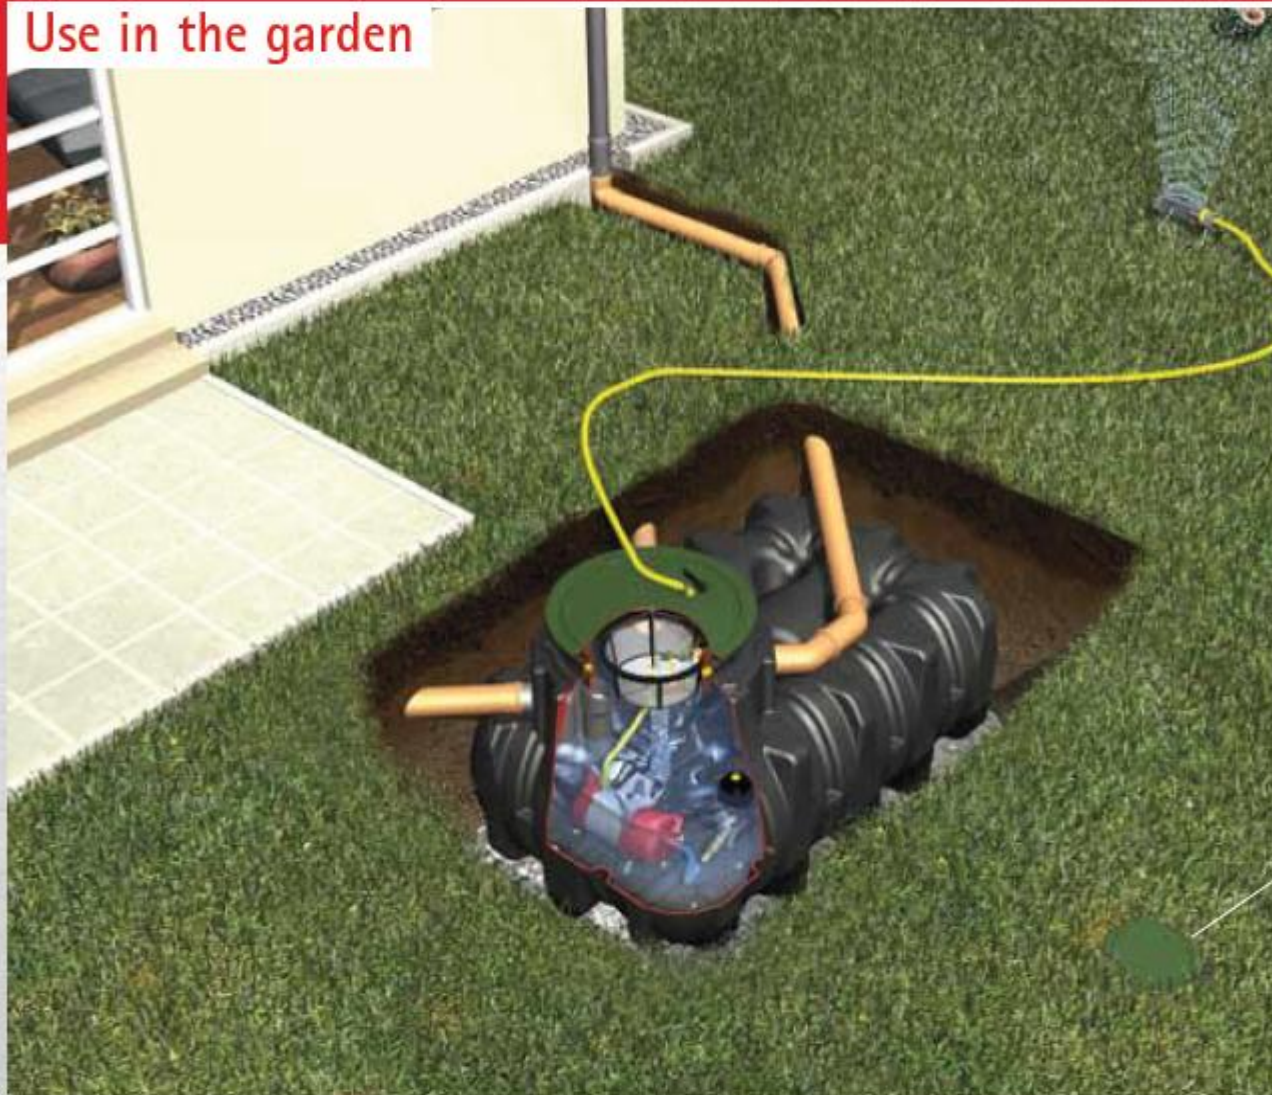

Platin® complete package Garden Comfort

- Draw water from the socket like electricity
- Simple installation thanks to integrated filter technology
- Water can be extracted using either an internal or external water connection box for standard watering systems
- Easy to assemble due to modular components
- Just one cover visible at the surface

Scope of supply:

- Platin® flat tank incl. 4 prefitted DN 100 lip seals
- Tank cover suitable for pedestrian or vehicle loading depending on the version
- Tank filter package for the garden consisting of:
 - Internal filter basket incl. suspension
 - Overflow siphon with integrated rodent guard
- Garden-Comfort technical package consisting of:
 - Integra stainless steel submersible and suction pump incl. floating extraction setup
 - 10m pressure hose 1"
 - Internal water connection box
 - External water connection box



With tank cover suitable for pedestrian loading

Content [l]	US-Gal
1500	400
3000	800
5000	1350



With tank cover suitable for vehicle loading

Content [l]	US-Gal
1500	400
3000	800
5000	1350

*Size 1500 l

DAMME

KUNSTSTOFFEN

Use in the home



Platin® complete package House ECO-Plus

- Self-cleaning integrated filter technology
- Drinking water intake controlled by floating switch as required
- Easy to assemble due to modular components
- Just one cover visible at the surface

Scope of supply:

- Platin® flat tank incl. 4 pre-fitted DN 100 lip seals
- Tank cover suitable for pedestrian or vehicle loading depending on the version
- Tank filter package for the house consisting of:
 - Minimax internal filter (self-cleaning)
 - Steady inlet pot and overflow siphon
 - Spannfix pipe connection sleeve
- ECO-Plus technical package consisting of:
 - Drinking water feeding console 15/4
 - Floating switch extraction unit
 - V2A switch control
 - Wall duct DN 100
 - Labelling set
 - PE suction pipe 12 m

1500l
400 US-Gal

3000l
800 US-Gal

5000l
1350 US-Gal



With tank cover suitable for
pedestrian loading

Content [l]	US-Gal
3000	800
5000	1350




With tank cover suitable for
vehicle loading

Content [l]	US-Gal
3000	800
5000	1350

Systematic rainwater harvesting

Technical data

Measurements/weights	1500 l 400 US-Gal	3000 l 800 US-Gal	5000 l 1350 US-Gal
Length [l]	2100 mm (82,6")	2450 mm (96,5")	2890 mm (113,7")
Width [w]	1250 mm (49,2")	2100 mm (82,6")	2300 mm (90,5")
Height of tank shoulder [h]	700 mm (27,5")	735 mm (28,9")	950 mm (37,4")
Height of dome collar [hd]	315 mm (12,4")	315 mm (12,4")	315 mm (12,4")
Ø inlet [e]	650 mm (25,96")	650 mm (25,96")	650 mm (25,96")
Ø tank dome [d]	800 mm (31,49")	800 mm (31,49")	800 mm (31,49")
Weight approx.	80 kg	170 kg	240 kg
Pounds/lbs	176,36	374,77	529,1

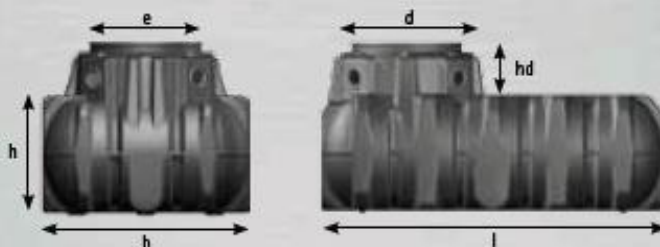

Delivery:

Delivery ex-factory. Contact our trade partners in your region for delivery costs.

Warranty clause:

The warranty mentioned in this brochure only applies to the corresponding underground tank and not to individual and accessory parts, even if they are included in the package price. We will replace materials free of charge within the warranty period – this does not cover extra services. The tank must be handled, assembled and installed according to the installation instructions for the warranty to apply. We reserve the right to technical modifications, further developments of individual products and errors.

All measurement and content details in this brochure are subject to a tolerance of $\pm 3\%$. The useable volume of the underground tank may be up to 10 % below the tank content depending on the connection version.

For all our offers and conclusions of contract are only valid our General Terms and Conditions of Business dated 01/01/2003 which we will send to you on request.